

Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler



The baler is in good, operational condition, dismantled, stored and available at short notice.

Technical data baler:

Manufacturer Bollegraaf

Type HBC 80 A

Year of construction 1995

Working hours 57,293, stand March 2022

Press power main press 78 tons

Press power of pre-press 42 tons

Feed channel 1,485 x 1,100 mm (l x w)

Capacity per cycle time 2,9 cbm

Theoretic cycle time 22 sec.

Bale size 720 x 1,100 mm (w x h), length adjustable

Driving motor 45 kW

Connected load 60 kW

Tying system 5-fold vertical, fully automated

Throughput rate at a

bulk weight of 30 kg/cbm approx. 9 tons/h

bulk weight of 50 kg/cbm approx. 18 tons/h

bulk weight of 100 kg/cbm approx. 30 tons/h

Throughput capacity with ruffler approx 20 tons/hour

Bale weight 550 up to 800 kg

Hydraulicoil 750 l

Baler dimensions with conveyor built up with hopper approx. 10,700 x 2,350 x 6,522 mm (l x w x h)

Transport dimensions only baler approx. 10,700 x 2,350 x 3,050 mm (l x w x h)

Machine weight baler approx. 24 tons

Condition:

The press is in a good, operational condition, dismantled, stored and available at short notice.

Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler

Additional equipment:

Between the discharge of the conveyor belt and the press, the press line is equipped with an optional pre-compressor and a ruffler. The pre-compressor consists of two laterally mounted pre-compression flaps that compress and thus pre-compress the material in front of the chute in the press, especially with large cardboard boxes and octainers. This prevents blockages and offers a higher material throughput with large-format cartons. The Wirbulator is mainly used to loosen up and distribute newspapers, magazines, books, etc. in order to create optimum compaction and dimensional stability of the bales.

Scope of delivery:



Press with pre-compact and ruffler.

The conveyor belt is not included in the scope of delivery and is not for sale.

Comments:

The documentation (Manual, CE-declaration, electr./hydr.-drawings), are completely available. Inspections are possible after agreement. We will not assume liability for the given technical data and possible errors.




Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler

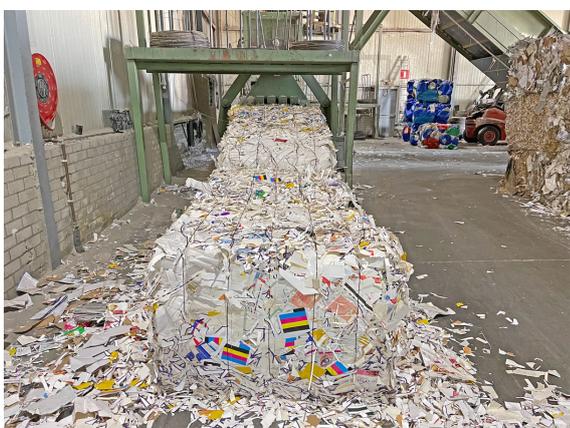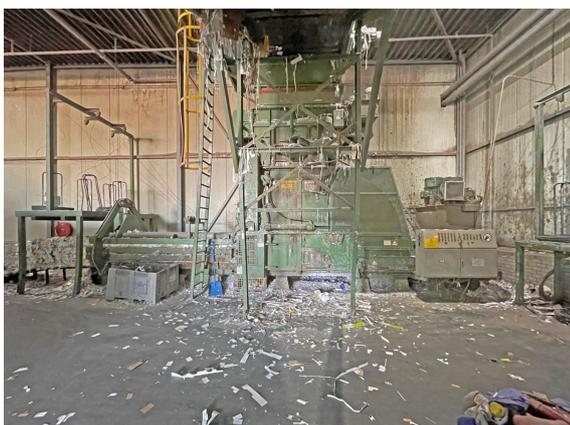

Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler



Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler

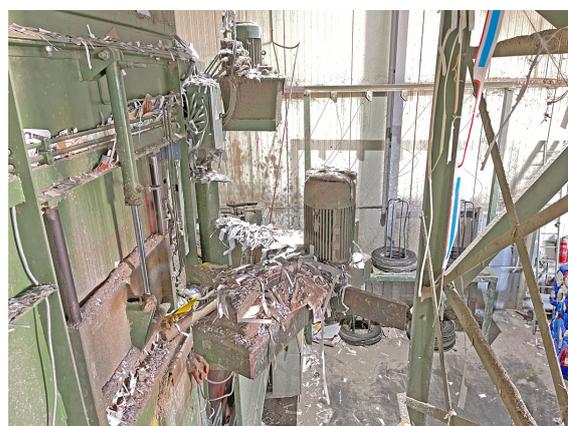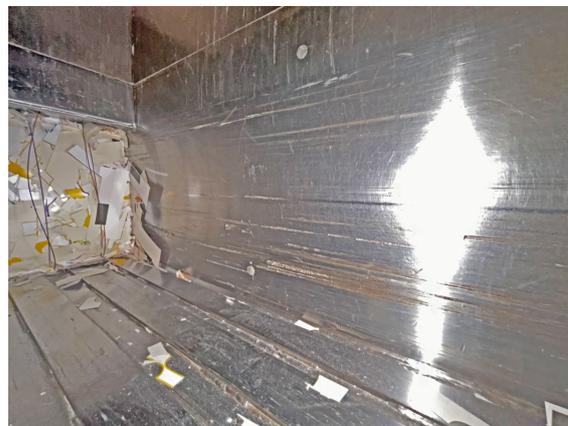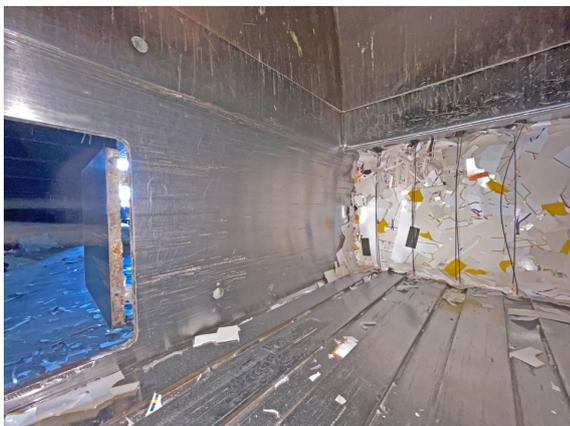

Baler Bollegraaf, type HBC 80 A, press power 78 tons, drive power 45 kW, yoc 1995, with pre-compressor and ruffler

